



**No sacrificial anode rod**

**Insulation: 2" of Polyurethane Foam**

**Fully customizable digital controller with a high temperature setting of 194°(Sanitizer Only)**

**Digital readout on controller allows for easy confirmation and adjustment of tank temperature and differentials (Sanitizer Only)**

**Special high temperature thermostats (up to 180°) (Dairy Only)**

- Our HydraStone™-lined, high temperature sanitizing tanks are designed for long life and are ideal for high moisture areas
- All plastic jackets protect heater and ensures years of reliable service in a high moisture environment
- Innovative Cold-Water Inlet & Diffuser, designed to reduce turbulence in the tank and facilitate tank stratification
- All bronze tappings contribute to long life of the tank
- Optional 4" gasketed Hand Hole Cleanout
- 5 year warranty non-pro-rated

### High Temperature Tanks

High Temperature Tanks from Vaughn Thermal combine time-proven technologies with our HydraStone lining for the industry's longest lasting and most reliable high temperature water heater. The Sanitizer and Dairy High Temperature Tanks are equipped with low watt density elements, thereby reducing the potential problem of mineral build up.



## High Temperature Tanks (Sanitizer & Dairy)

Available in 80-119 Gallon Capacities



*Dairy*

*Sanitizer*

# HS

## SERIES

978-462-6683  
vaughncorp.com  
sales@vaughncorp.com

### PRODUCT SPECIFICATIONS

<b>Tank</b>	HydraStone Lined Steel
<b>Capacities</b>	80 to 119 Gallons
<b>Orientation</b>	Vertical
<b>Voltages</b>	120 thru 480 Volt
<b>Phase</b>	1 Phase
<b>Inlet Size</b>	3/4" Female NPT
<b>Outlet Size</b>	3/4" Male NPT
<b>Drain Size</b>	3/4" GHT
<b>Relief Valve Size</b>	3/4" Female NPT
<b>Relief Valve Type</b>	T&P, 210°F, 150 psi
<b>Thermostat Range</b>	110-180°F (surface)
<b>Hi-Limit</b>	200°F Manual Reset
<b>Design TP</b>	300 psi
<b>Elements</b>	Incoloy Sheathed
<b>Insulation</b>	2" Polyurethane Foam
<b>Tank Warranty</b>	5 Year Non Pro-Rated
<b>Electrical Warranty</b>	1 Year
<b>Jacket</b>	High Impact Colorized Composite
<b>Finish</b>	White with Black Trim

### GENERAL SPECIFICATIONS

**Tank:** The Vaughn tank is welded heavy steel construction designed for 150 psi working pressure and tested to 300 psi. Each tank is centrifugally lined with 1/2" thick seamless high-density HydraStone with guaranteed 100% coverage of all steel surfaces. All tank openings are non-ferrous solid copper-silicon and are resistant to the corrosive effects of hot water.

**Plumbing :** 3/4" combination cold water inlet and drain, with non-corrosive strata flow diffuser which prevents incoming cold water from mixing too rapidly with the hot water in the tank and ensures delivery of more hot water. A 3/4" hot water outlet with a uniquely designed built-in heat trap prevents heated water from radiating through the piping during standby periods.

**Electrical:** Incoloy sheathed immersion heating elements with low watt density for prolonged life in 120, 208, 240, 277, 480-volt single phase. An adjustable surface thermostat operates in the 110-170°F range. Integral hi-limit with a manual reset button for over-temperature protection is factory set at 180°F. Upper and lower element configurations are factory wired for non-simultaneous operation.


**Insulation:** Highly efficient thick non-CFC polyurethane foam insulation meets or exceeds the requirements of ANSI/ASHRAE/IESNA 90.1-2018 standards for energy efficiency and heat loss.

**Jacket:** The exterior protective jacket is constructed from high-impact composite material which cannot rust or corrode and is maintenance-free.

## THE BENEFIT OF HYDRASTONE™ LINED TANKS

**1/2 inch high density HydraStone cement is 100 times thicker than a glass lining**

Full and uniform coverage is achieved by centrifugally spinning the tank with the precise amount of HydraStone cement inside. This process provides maximum protection from the corrosive effects of hot water and makes our water heaters some of the longest lasting on the market. Additionally, **HydraStone lined tanks do not require a sacrificial anode**, eliminating periodic inspections and replacement costs associated with glass lined tanks.

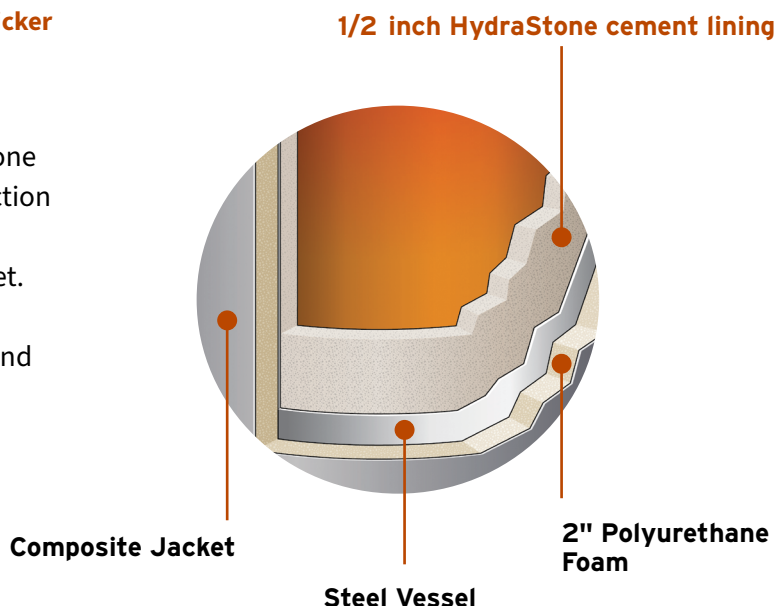

## TANK SPECIFICATIONS (SANITIZER MODEL)

MODEL	Storage Capacity (Gallons)	Height (inches)	Diameter (inches)	Shipping Weight (lbs.)
S80SD6060I	80	58	26	325
S120SD6060I	119	69.375	26	360

## TANK SPECIFICATIONS (HAND HOLE DAIRY MODEL)

MODEL	Storage Capacity (Gallons)	Height (inches)	Diameter (inches)	Shipping Weight (lbs.)
S80HHD6060	80	57.25	26	362
S100THHD6060	100	69.375	26	410
S120HHD6060	115	67.5	28	450

**Elements:** 6000 Watt, 240 Volt, low watt density





Vaughn is the leading manufacturer of HydraStone (HS) lined and Featherweight (FW) Thermoplastic water heaters. We manufacture 30-120 gallon electric, hybrid, indirect, and solar water heaters for residential and commercial applications as well as energy controllers and electronic devices.

## To learn more, contact us

978-462-6683 | [vaughncorp.com](http://vaughncorp.com) | [sales@vaughncorp.com](mailto:sales@vaughncorp.com)  
26 Old Elm Street | P.O. Box 5431 | Salisbury, MA 01952

V1020-A-20250708