


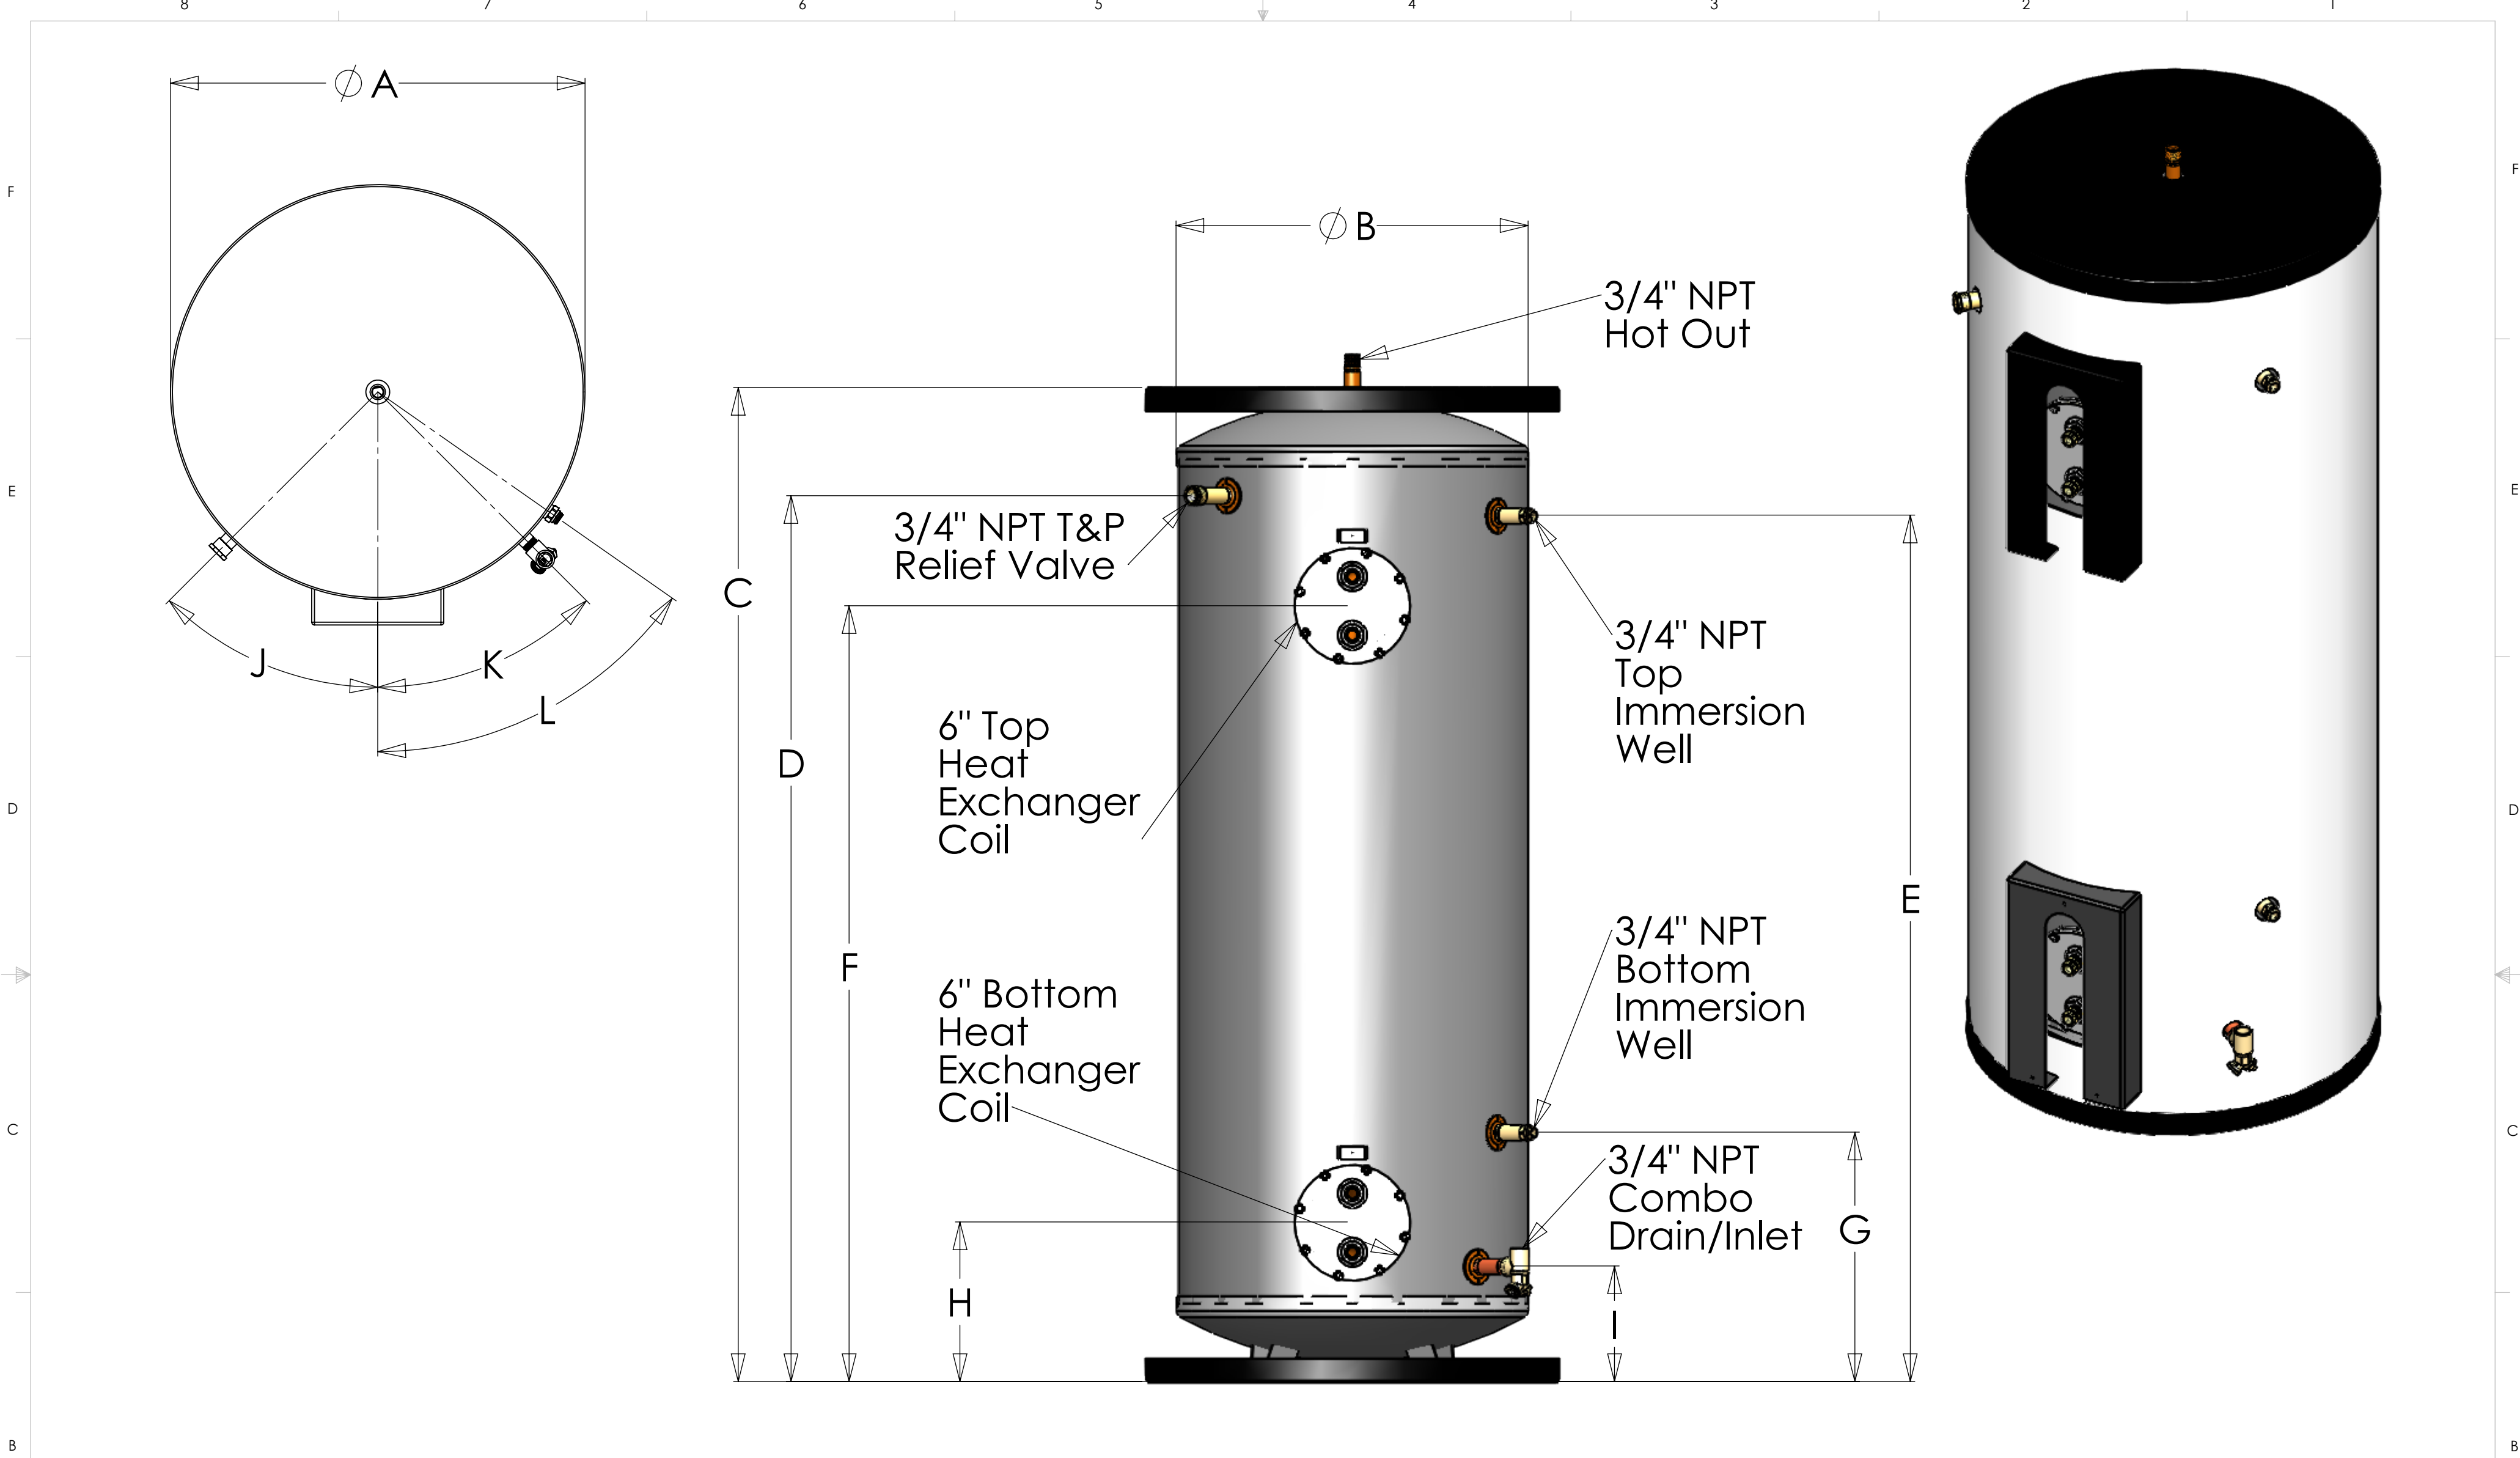

MODEL	A	B	C	D	E	F	G	H	I	J	K	L
	Jacket Diameter	Tank Diameter	Height to Pan	Height to T&P Relief Valve	Height to Top Immersion	Height to Top HX	Height to Bottom Immersion	Height to Bottom HX	Height to Combo Drain	Angle of T&P Relief Valve	Angle of Combo Drain	Angle of Immersion
65HX62TB	26	22	46.125	39.375	38.5	31.875	17	10.875	7.875	45	45	55
80HX62TB	26	22	57.125	49.875	48.875	42.5	17	10.875	7.875	45	45	55
80THX62TB	22.75	19	71.625	64.375	63.5	56.875	17	10.875	7.875	50	50	60
100HX62TB	26	22	67.375	60.375	59	52.875	17	10.875	7.875	45	45	55
120HX62TB	28	24	67.625	60.375	59	52.875	17	10.875	7.875	45	45	55

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. THE CONTENTS OF THIS DRAWING ARE THE SOLE PROPERTY OF VAUGHN THERMAL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VAUGHN THERMAL CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

LINEAR: 1 Decimal Place = ± 0.1
2 Decimal Place = ± 0.01
3 Decimal Place = ± 0.005

ANGULAR: 0 Decimal Place = ± 1.0°
1 Decimal Place = ± 0.5°

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL:

FINISH:

DRAWN	RP	6/24/2019
CHECKED	RP	4/28/2020
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		
PART NUMBER:		

NAME

DATE

DATE

Vaughn Thermal Corp.

TITLE:

Tank Assembly HX62TB Configurations

SIZE	DWG. NO.	REV
C	V41A0825	C
SCALE: 1:8	SHEETS: 1	