


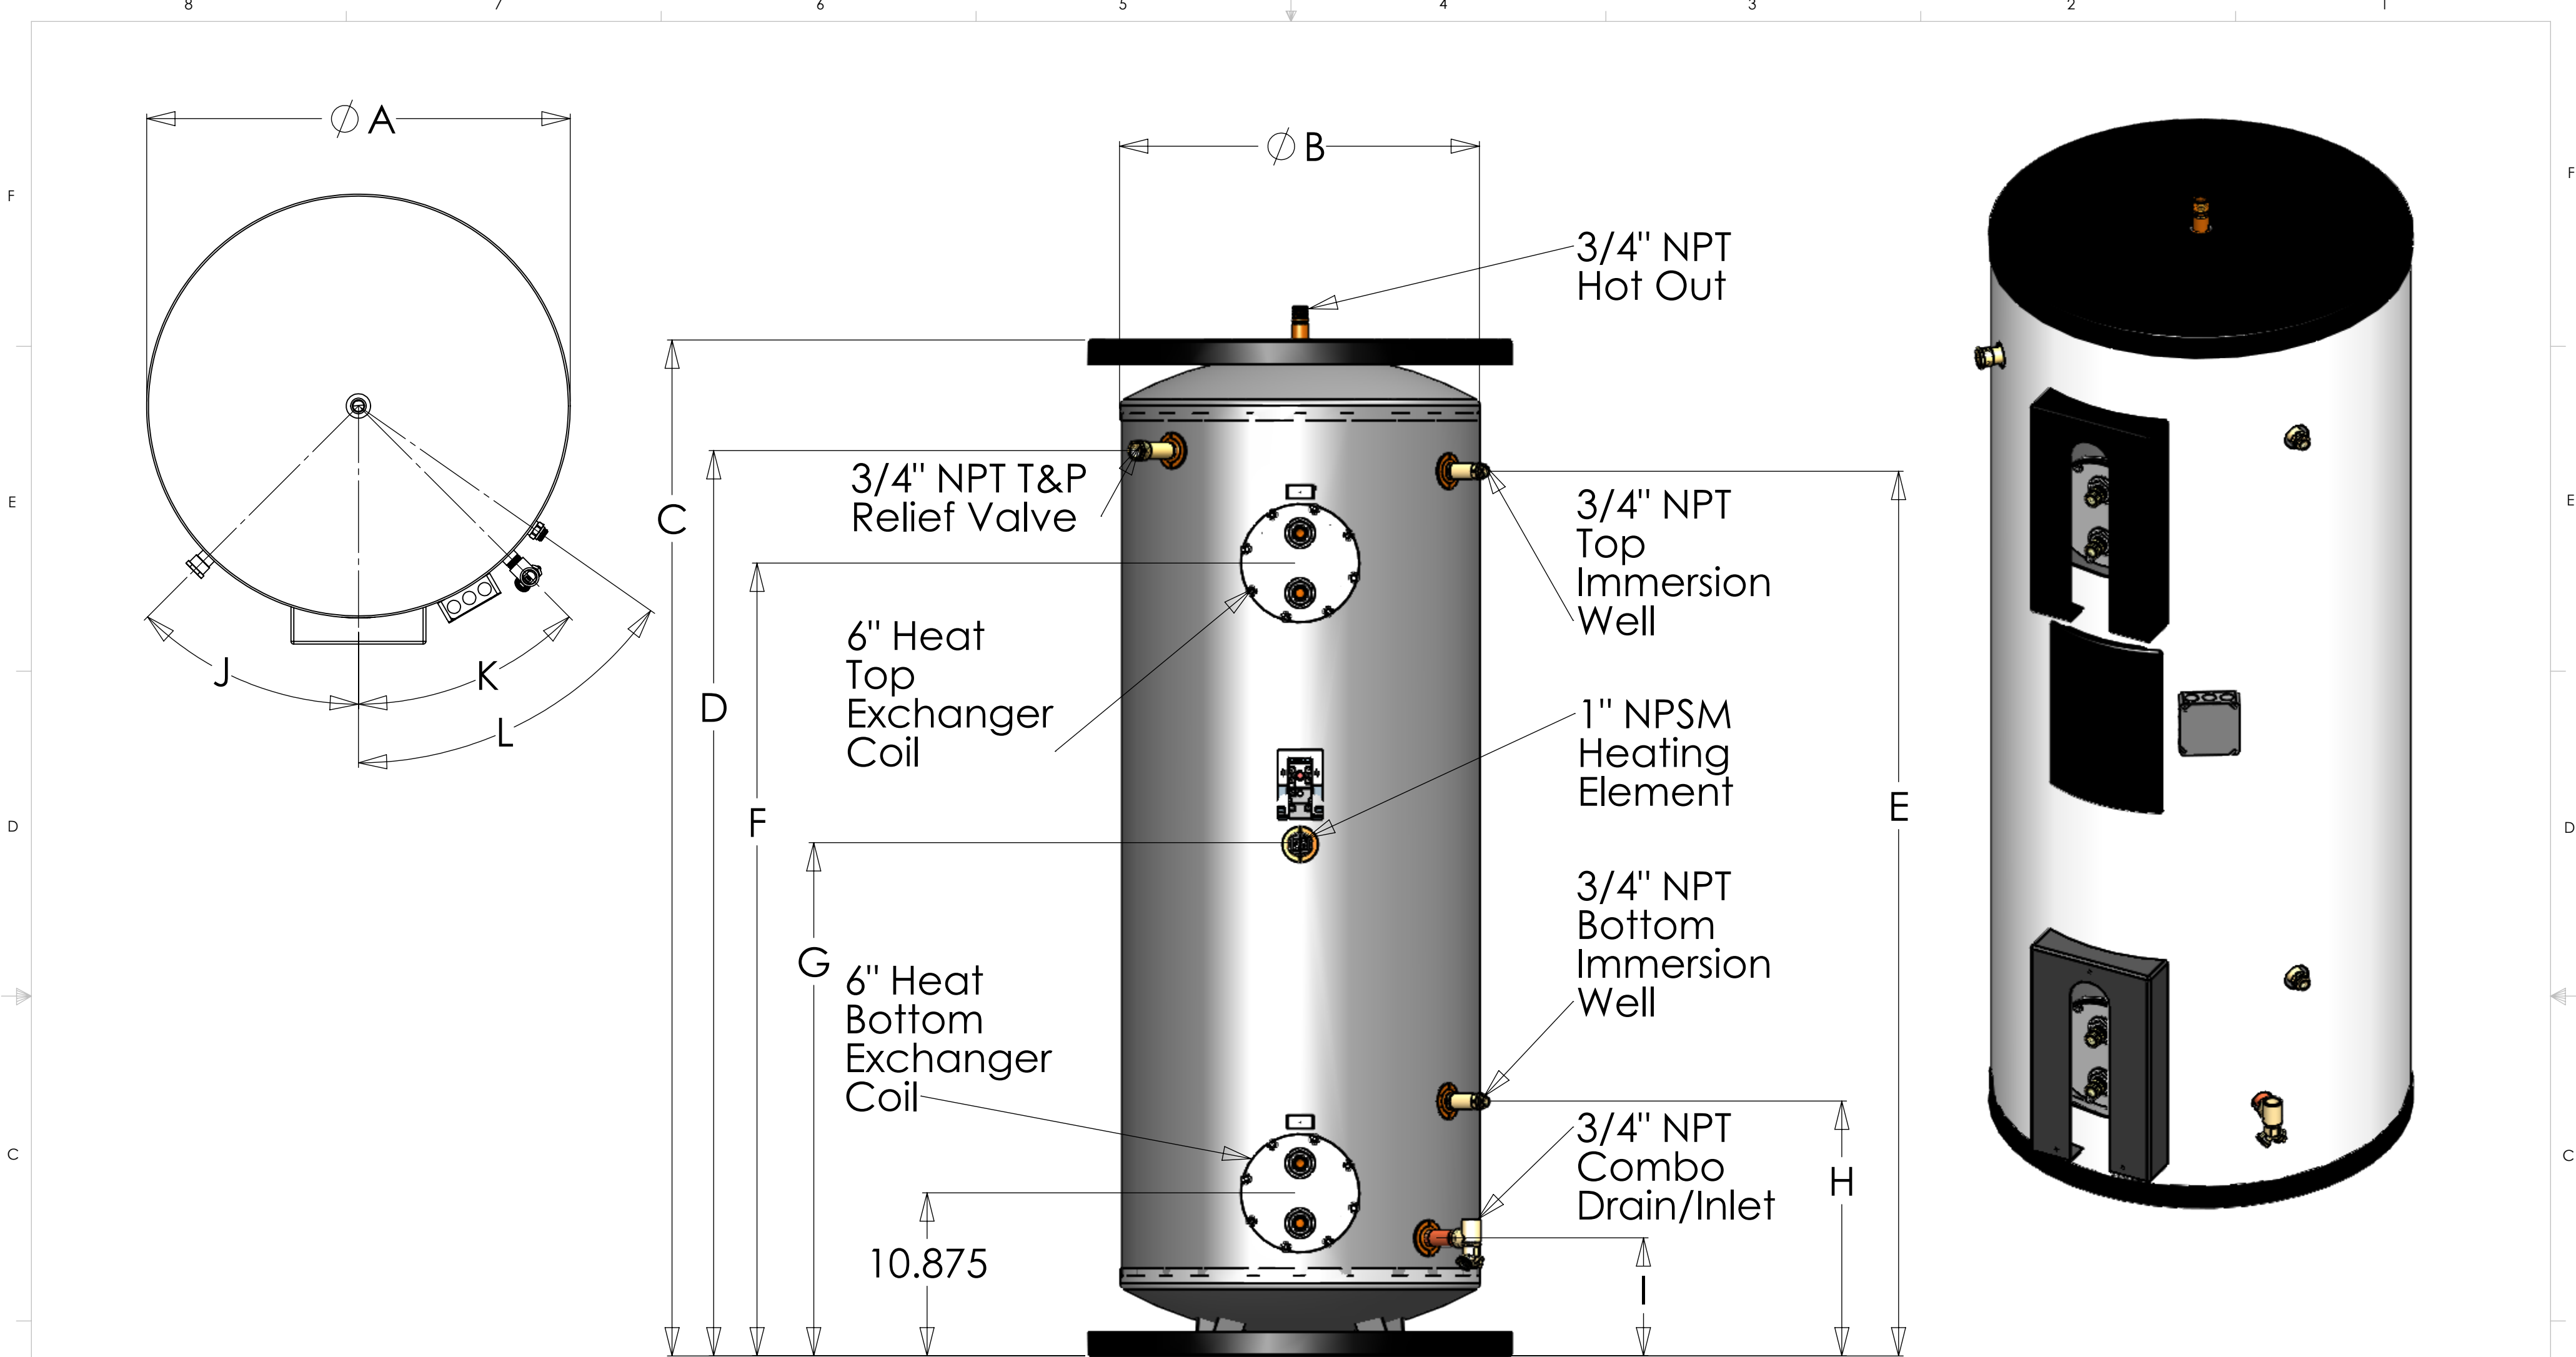

MODEL	A	B	C	D	E	F	G	H	I	J	K	L
	Jacket Diameter	Tank Diameter	Height to Pan	Height to T&P Relief Valve	Height to Top Immersion	Height to Top HX	Height to Element	Height to Bottom Immersion	Height to Combo Drain	Angle of T&P Relief Valve	Angle of Combo Drain	Angle of Immersion
65SR62TB	26	22	46.25	39.375	39.375	36.125	23.625	17	7.875	45	45	55
80SR62TB	26	22	57.25	49.875	48.875	42.375	25.375	17	7.875	45	45	55
80TSR62TB	22.75	19	71.75	64.375	63.5	56.875	30.75	17	7.875	50	50	60
100SR62TB	26	22	67.5	60.375	59	52.875	34.125	17	7.875	45	45	55
120SR62TB	28	24	67.625	60.375	59	52.875	34.125	17	7.875	45	45	55

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. THE CONTENTS OF THIS DRAWING ARE THE SOLE PROPERTY OF VAUGHN THERMAL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VAUGHN THERMAL CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

LINEAR: 1 Decimal Place = ± 0.1
2 Decimal Place = ± 0.01
3 Decimal Place = ± 0.005

ANGULAR: 0 Decimal Place = ± 1.0°
1 Decimal Place = ± 0.5°

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL:

FINISH:

DRAWN	RP	6/24/2019
CHECKED	RP	5/1/2020
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		
PART NUMBER:		

NAME

DATE

DATE

Vaughn Thermal Corp.

TITLE:

Tank Assembly SR62TB Configurations

SIZE	DWG. NO.	REV
C	V43A0300	C
SCALE: 1:8	SHEETS: 1	